

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

OGOH:069

U.S. APPLICATION NO. (if known) 35 CFR 1.51

097/787030

INTERNATIONAL APPLICATION NO.

PCT/JP00/04718

INTERNATIONAL FILING DATE

13 July 2000

PRIORITY DATE CLAIMED

13 July 1999

TITLE OF INVENTION

CONTROL NETWORK SYSTEM OF HOUSEHOLD ELECTRIC APPLIANCE

APPLICANT(S) FOR DO/EO/US


Yasuyuki SHINTANI; Reiko UENO

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 29(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
International Application Cover Page;
International Search Report;
PCT Request;
Forms PCT/IB/301; 304; and 308.

09/787030 PCT/JPO0/04718		ATTORNEY'S DOCKET NUMBER OGOH-069	
17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1,000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$760.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =		CALCULATIONS PTO USE ONLY 	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).		\$ 860.00 \$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	* RATE
Total claims	12 - 20 =	0	X \$18.00
Independent claims	9 - 3 =	6	X \$80.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)		+ \$270.00	
TOTAL OF ABOVE CALCULATIONS =		\$ 1,340.00	
Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).		\$	
SUBTOTAL =		\$ 1,340.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		\$	
TOTAL NATIONAL FEE =		\$ 1,340.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property		\$ 40.00	
TOTAL FEES ENCLOSED =		\$ 1,380.00	
Amount to be:		\$	
refunded		\$	
charged		\$	
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1,380.00</u> to cover the above fees is enclosed. CK# <u>13802</u> b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>16-0331</u> . A duplicate copy of this sheet is enclosed.			
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.			
SEND ALL CORRESPONDENCE TO Roger W. Parkhurst PARKHURST & WENDEL, L.L.P. 1421 Prince St., Ste. 210 Alexandria, VA 22314-2805 Tel: (703) 739-0220		 SIGNATURE Roger W. Parkhurst NAME 25,177 REGISTRATION NUMBER	
ATTY. DOCKET NO.: OGOH:069			

09/787030

JG08 Rec'd PCT/PTO 13 MAR 2008

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Yasuyuki SHINTANI et al.

Serial No.: New Application (PCT/JP00/04718)

Filed: March 13, 2001

For: CONTROL NETWORK SYSTEM OF HOUSEHOLD ELECTRIC APPLIANCE

PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination of the above-identified application,
please enter the following specification changes as noted below:

IN THE CLAIMS:

Please amend claims 10 and 12 as follows:

10. (Amended) A control network system of an appliance according to Claim 1,

wherein an operation of at least one of said plurality of appliances connected through the network can be directly controlled by a user with a common remote controller; and

said controller or said means of controlling a linked operation is provided for said remote controller.

12. (Amended) A control network system of an appliance according to Claim 1, wherein a remote controller of at least one of said plurality of appliances connected through the network comprises a means of displaying a warning of a disorder when the disorder is caused such that at least one of a total electric power consumption and a electric current of the plurality of appliances surpasses a limited value due to an operation of another appliance by a user.

REMARKS


Claims 1-12 remain pending herein. Claims 10 and 12 have been amended hereby.

This Preliminary Amendment is submitted to eliminate multiply dependent claims from the above-identified application.

Examination of this application on its merits is respectfully requested.

Respectfully submitted,
PARKHURST & WENDEL, L.L.P.

March 13, 2001
Date


Roger W. Parkhurst
Registration No. 25,177

RWP/ame

Attachment:
Mark-Up of Amended Claims

Attorney Docket No. OGOH:069

PARKHURST & WENDEL, L.L.P.
1421 Prince Street, Suite 210
Alexandria, Virginia 22314-2805
Telephone: (703) 739-0220

Serial No.: New Application (PCT/JP00/04718)

VERSION WITH MARKINGS TO SHOW CHANGES MADE

10. (Amended) A control network system of an appliance according to [any one of Claims 1 to 9] Claim 1,

wherein an operation of at least one of said plurality of appliances connected through the network can be directly controlled by a user with a common remote controller; and

said controller or said means of controlling a linked operation is provided for said remote controller.

12. (Amended) A control network system of an appliance according to [any one of Claims 1 to 9] Claim 1, wherein a remote controller of at least one of said plurality of appliances connected through the network comprises a means of displaying a warning of a disorder when the disorder is caused such that at least one of a total electric power consumption and a electric current of the plurality of appliances surpasses a limited value due to an operation of another appliance by a user.

15/PRTS

CONTROL NETWORK SYSTEM OF HOUSEHOLD ELECTRIC APPLIANCE

TECHNICAL FIELD

The present invention relates to control network systems of household electric appliances. More particularly, the invention relates to exchanges of operation data between household electric appliances provided in home networks and the most appropriate operations in accordance with the data.

BACKGROUND OF THE INVENTION

(General background arts of the present invention)

In recent years various appliances have been used in houses, buildings, and floors and sections thereof. Accordingly, attempts to acquire more comfortable life, improve operating conditions, save more energy and make operations more efficient have been made by integrally controlling the appliances under home networks (or home network systems).

Specifically, for example, air conditioners, refrigerators, fans, solar heaters for bathwater, microwave ovens, hot-water supplies, electric kotatsu, warm air circulators, electric clocks, televisions, illuminators or the like are used in houses. Since time and period when these appliances are used relate greatly therebetween, operation and standby thereof are properly controlled in consideration of conditions such as the time and the

period so that more comfortable life, a saving of more energy and the like are intended.

More specifically, the attempts are as follows:

- 1) Solar heaters can be frequently used for bathwater in the summer season. Thermostat of hot-water supplies, therefore, does not have to be set to so high temperature in a time slot for bathing so that the bathwater should be set to lower temperature than the winter season.
- 2) Power level of air conditioners is reduced even in the summer season for an extremely short time for using microwave ovens. Consequently, electric power simultaneously consumed in the whole house can be decreased.
- 3) Power level and switching of air conditioners in rooms are controlled by detecting the presence of persons therein with sensors.
- 4) Power level of air conditioners in offices is controlled by sensing the operating conditions of appliances as heating sources in operation therein.
- 5) Unnecessary illuminators in rooms are switched off in accordance with the time of day and the positions of appliances in operation therein.
- 6) Illuminators and air conditioners in empty classrooms are switched off at universities.

In addition, it has been studied and attempted that not merely the switching of appliances is controlled in accordance with seasons and the time of day but also aged people and infants are cared for and watched over particularly in houses where only aged people live or their parents are

frequently absent by detecting the operating conditions.

Examples are as follows:

- 1) Domestic helpers are informed of disorders through telephone lines when the following disorders are detected; a door of toilets is not opened and shut for more than a certain time, a volume of televisions is too high, the operations of various appliances are unnatural such that air conditioners and warm air circulators are simultaneously in operation, or the like.
- 2) Parents are warned by the screen and voice of televisions when a portable telephone of their children go out of an area supervised by a station in charge of the neighborhood of their house.

Connections between various appliances for the above-mentioned purposes are conceptionally shown in Figure 1.

In Figure 1, a refrigerator 1, an air conditioner 2, an electric kotatsu 3, a fluorescent light 4, a microwave oven 5 and a washing machine 6 are connected to a controller (or a CPU) 10 by an electric wire 11, and thus a (sub) network is configured. A television 7 and an electric clock 8 are connected to the controller 10 by an infrared ray 12, and thus a (sub) network is configured. A telephone 9 is connected to the controller 10 by a wireless 13, and thus a (sub) network is configured.

In addition to the above, other means such as supersonic waves or plural means are used for connecting the appliances.

Also regarding the network, as shown in Figure 1, many appliances

and (sub) networks are connected radially from the only controller 10, and additionally as shown in Figure 2 (a), in order to decrease the maximum electric power consumption in factories and buildings, several (sub) networks having a router {which is positioned between plural (sub) networks to realize mutual communication therebetween. In Figure 1, the controller 10 serves for the router. A communication processing function attached to an appliance serves for the router depending on a system and the appliance.} are connected by the router or an appliance serving for the router as a terminal of components thereof. Furthermore, as shown in Figure 2 (b), appliances and (sub) networks are hierarchically connected as trees.

In Figures 2 (a) and (b), 20 indicates a (sub) network or an appliance as a substantial (sub) network and 30 indicates a router or an appliance serving for the router.

Full-time custodians as well as information desks and doorbells are occasionally incorporated into a system in factories, office buildings and hospitals.

Another example is not so complicated but a simple constitution; in the case of connecting a television and a video tape recorder, the video tape recorder periodically reads out a time signal in airwaves, which the television received, to adjust its built-in clock thereby for the purpose of displaying an exact time.

Moreover, various kinds of standards and plans therefor (such as ET -

2101 and JEM - 1439) have been decided and proposed in the Electronic Industries Association of Japan, the Japan Electrical Manufacturers' Association and the like in order to effectively perform the functions of the networks.

Also, communications protocols and the like have been decided or developed.

For that purpose, equipments and functions such as communication processing functions necessary for performing the appropriate functions of the home networks have been attached to appliances (including sensors) in the stage of manufacturing or studied for attaching.

(Background arts in view of the problems to be solved by the present invention)

In the above-mentioned configuration of control network systems of appliances, particularly household electric appliances, however, it should be recognized beforehand in the stage of designing the systems that which of the following methods the controller employs for acquiring operation data for controlling the appliances: a method of receiving the operation data transmitted from each of the appliances in changing the operation data such as switching, a method of receiving the operation data by a query from the controller to the appliances, a method of receiving the operation data periodically transmitted from the appliances to the controller, a method of receiving the operation data broadcasted from each of the appliances in changing the operation data, and the like. In terms of

the conditions of the household electric appliances, the need to change how the controller acquires the operation data is occasionally caused on each introduction of other household electric appliances.

For the purpose of linked operations only by household electric appliances, addresses of household electric appliances for receiving operation data should be set at household electric appliances for transmitting the operation data, and additionally addresses of the household electric appliances for transmitting the operation data should be set at the household electric appliances for receiving the operation data. The setting, therefore, should be performed in each of control network systems of household electric appliances.

On the other hand, the problem is occasionally the electric power consumption of a controller in a system such that the controller receives operation data of household electric appliances to generate a command of operating other household electric appliances in accordance with the received operation data, and thereafter the controller transmits the command to other household electric appliances to control linkedly. That is, the electric power consumption of the household electric appliances is approximately 0.5W on standby, while the electric power consumption of a personal computer as the controller is several tens to 100W. Furthermore, in many cases the controller is constantly operated because of watching data in a network, leading to more electric power consumption thereof.

Available network wires, means and costs are limited in control

network systems of household electric appliances.

Accordingly, it has been desirable that a technology without the need to change how a controller acquires operation data on each introduction of other household electric appliances is developed subject to many limitations in control network systems of household electric appliances.

Regarding linked operations between household electric appliances, it has been desirable that a technology of facilitating the setting of addresses and offering less electric power consumption is developed.

Also, it has been desirable that a technology of linkedly controlling household electric appliances without a controller with a considerable electric power consumption is developed.

DISCLOSURE OF THE INVENTION

The present invention is intended for solving the above-mentioned problems.

The following are noted:

Communication definition objects are decided in communications middlewares for connecting applications softwares and sub communications softwares, and thus appliances can be linkedly operated and controlled:

Appliances need specific kinds of other appliances and their operation data for effective operations thereof:

Many appliances already have a function of outputting operating

conditions thereof to units at present;

Appliances need kinds and the contents of operation data of other appliances for effective operations thereof;

Specific amounts and kinds of household electric appliances are actually used in houses, and additionally the contents of effective operation and control thereof are simple;

Operators use remote controllers of household electric appliances, while the remote controllers operate specific kinds of the household electric appliances and remote controllers have been common to household electric appliances; and

The contents of operations of household electric appliances related with each other are simple and not complicated.

The present aspect of the invention is embodied below.

An aspect of the invention is characterized in that a network is provided with a controller; the controller acquires operation data (including a measurement by a sensor such as an electric current and a result of processing the measurement) of an appliance (including the sensor and an integral-type appliance of a television and a video tape recorder) to be linkedly operated and controlled thereby, and the controller transmits the operation data to another appliance; therefore the appliance maintains in advance information, communications protocols, data or equipments of transmitting conditions such that when and where data such as switching, a change in operation mode and an introduction thereof

to the network are transmitted or not, and the appliance transmits necessary operation data to the controller in accordance with the information, communications protocols, data or equipments after adjusting with the controller; the controller, meanwhile, controls the information of transmitting conditions of the appliance, and additionally the controller receives necessary operation data after adjusting with the appliance to transmit the operation data or a direction to another appliance, and furthermore, depending on the situation, the controller provides the appliance with a new setting such that which operation data should be transmitted at what time and a setting such that unnecessary operation data should not be transmitted; and the appliance can accept the setting.

The above-mentioned configuration enables that the appliances are linkedly operated and the whole network system is effectively operated.

Another aspect of the invention is characterized in that a network is not provided with a controller; an appliance utilizing operation data of another appliance related therewith has a means of linkedly controlling for operating in accordance with kinds of the related appliance after acquiring the operation data thereof; the appliance exchanges necessary information of transmitting conditions before transmitting and receiving the operation data of the related appliance for the purpose of its appropriate operations; and consequently the appliance acquires the necessary operation data of the related appliance depending on the situation, leading to linked control and operation.

A further aspect of the invention is characterized by comprising a device for setting linked operations in installing an appliance control network system and introducing another appliance thereto; and in that the device sets the function of linkedly operating at an appliance.

Three other aspects of the invention are characterized in that an appliance for outputting data according to any one of a second and a third aspects of the invention is a sensor for detecting the presence of persons by voice, motion, infrared ray and the like; and an appliance utilizing the data is an air conditioner. Needless to say, the appliance may be an illuminator, a ventilation fan or the like.

Three other aspects of the invention are characterized in that an appliance for outputting data is an electric power sensor such as an electric current meter; and an appliance utilizing the data is an air conditioner with a large electric power consumption.

A still further aspect of the invention is characterized in that a controller watches electric power consumption and electric current consumption of an appliance connected to an appliance control network system; and the controller controls the electric power consumption and the electric current consumption less than a predetermined value. Specifically, before the electric power consumption and the electric current consumption surpass the predetermined value, a load of an appliance with less necessity should be reduced and an appliance should be switched off and also a user should be informed of a predetermined warning.

A still further aspect of the invention similar to an eighth aspect of the invention is characterized in that a device for setting linked operations, not a controller, controls total electric power consumption of appliances (including NFB and a safety device serving therefor) less than a predetermined value.

Three other aspects of the invention are characterized in that an appliance and a controller common to appliances are provided with a controller or a means of linkedly controlling in an appliance control network system. Accordingly, the following disorders due to operations by a user can be effectively prevented from being caused: total electric power consumption of appliances surpasses a predetermined value, an air conditioner and a warm air circulator are simultaneously in operation, or the like. In the case of a controller common to appliances, several measures for the disorders can be displayed on a display unit thereof, and thereafter the user can choose from the measures.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a view showing a configuration of a home network system of conventional household electric appliances.

Fig. 2 is a view showing another configuration of a home network system of conventional household electric appliances.

Fig. 3 is a flow chart showing basic procedures for linked operations between appliances in embodiments of the present invention.

Fig. 4 is a view showing a constitution of Embodiment 1 of the present invention.

Fig. 5 is a view showing a configuration of a controller in Embodiment 1 of the present invention.

Fig. 6 is a view showing another configuration of a controller in Embodiment 1 of the present invention.

Fig. 7 is a view showing a further configuration of a controller in Embodiment 1 of the present invention.

Fig. 8 is a view showing information to be transmitted from household electric appliances stored in ROM of the above-mentioned controller and data of other household electric appliances serving for appropriate operations thereof.

Fig. 9 is a view showing data of household electric appliances necessary for other household electric appliances stored in RAM of the above-mentioned controller and a flow chart showing program procedures for performing functions in accordance with the data.

Fig. 10 is a view showing a constitution of Embodiment 2 of the present invention.

Fig. 11 is a flow chart showing procedures for setting and controlling linked operations of an exhaust fan to a cooking stove and an air conditioner in Embodiment 2 of the present invention.

Fig. 12 is a view showing a principal constitution of Embodiment 3 of the present invention.

Fig. 13 is a view showing a principal constitution of Embodiment 4 of the present invention.

Fig. 14 is a view showing a principal constitution of Embodiment 4 of the present invention (in the case of comprising a device for setting linked operations).

Fig. 15 is a view showing a principal constitution of Embodiment 5 of the present invention.

(Reference characters)

- 1 a refrigerator
- 2 an air conditioner
- 3 an electric kotatsu
- 4 a fluorescent light
- 5 a microwave oven
- 6 a washing machine
- 7 a televisior and a video tape recorder
- 8 an electric clock
- 9 a telephone
- 10 a controller
- 11 an electric wire
- 12 an infrared ray
- 13 a wireless
- 20 a sub network
- 30 a router

- 40 a device for setting linked operations
- 100 a controller
- 101 a means of controlling communications
- 102 a means of controlling information of transmitting condition
- 103 a means of acquiring operation data
- 110 a network line
- 111 a CPU
- 112 a UI
- 113 a ROM
- 114 a RAM
- 300 a household electric appliance
- 301 a means of controlling communications
- 302 a means of maintaining information of transmitting condition
- 303 a means of controlling transmission of operation data
- 304 a means of controlling information of transmitting condition
- 305 a means of controlling operation data
- 310 a sensor for the presence of persons
- 311 a means of setting information of transmitting condition
- 321 a means of transmitting demand data for setting information of transmitting condition
- 322 a means of setting reception of operation data
- 323 a means of controlling linked operations
- 330 a household electric appliance

401 a means of controlling communications

402 a means of transmitting demand data for setting information of
transmitting condition

403 a means of transmitting demand data for setting reception of
operation data

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is described below based on preferred
embodiments.

(Embodiment 1)

Embodiment 1 employs a controller for linkedly operating an
appliance.

A configuration of hardwares and softwares in an appliance, which is
presuppositional for actually performing Embodiment 1, is described
(linked operations in a home network in other Embodiments are basically
the same as Embodiment 1.).

First, it is described by an example whether to execute linked
operations in a home network of household electric appliances.

In order to print with a special font by a printer connected to a
computer, the printer decides whether a command of printing with a
special font is input from a user in advance of printing. If the command is
input, the printer decides whether necessary data for printing with a
special font are stored in a predetermined memory. If the data are stored,

the printing is executed by reading in the data. If the data are not stored, then a warning is displayed on a display unit to halt the printing. Alternatively, if the command is not input, necessary data for printing with an ordinary font are read out from a memory to execute the printing.

The execution of linked operations in a home network of household electric appliances is basically the same as the above. That is, when a household electric appliance is provided for a home and started, a predetermined access to other household electric appliances is executed through an electric wire in accordance with a user's direction for linked operations and an internal program, and thereafter the household electric appliance decides by a response thereto whether other household electric appliances are linkedly operated, resulting in individual operations or linked operations.

Next, the contents of a demand for setting information of transmitting conditions, a setting of reception and transmission of operation data and reception of both are described as a part of linked operations by an example.

Nowadays, many appliances have a function of informing or enabling to inform or direct a user of operating conditions thereof for the purpose of user's convenience of controlling. The examples are as follows; a periodical printout of transmit-receive records in a facsimile, a display of temperature to be set in an air conditioner, and besides household electric appliances a display of mileage, fuel and lubricating oil in a car.

Moreover, appliances display to a user operating conditions or functions to be performed so that the user chooses which function is performed. For example, many video tape recorders light a recording lamp and display on a display screen of a television a standard-speed recording, a 3-speed recording or a commercial-skip recording to be chosen by the user with a remote controller. Air conditioners display on a remote controller a choice between cooling and heating, a setting of temperature, operating time and the like, leading to the performance of user's desirable function.

In Embodiment 1, household electric appliances basically utilize the functions so that a switching and a choice of operating mode are executed by a user. In the case of linked operations, however, the switching and the choice of operating mode are executed by a controller, not the user. Needless to say, the contents of data and the frequency of exchanges thereof vary with the situation.

Next, transmission and reception of necessary data for linked operations are described by an example.

An appliance periodically stores a predetermined operation data or update the data on every change in operating conditions, and additionally the data can be output by a user. This is such that the conditions of units are displayed in a central control room, a driver's seat and the like in plants for vessels and aircrafts; and flight conditions are constantly recorded at a flight recorder in aircrafts.

The examples are as follows: a display of the number of times documents are corrected in using a word processor; a display of the number of copying papers in a copying machine; a small display of switch-on in a televisior; a display of a channel on which another program than a currently watched program is on record in a video tape recorder; a display of current conditions in an electric rice cooker; and the like.

Furthermore, a household electric appliance mutually adjusts the performance of its function in conformity with communications protocols. Specifically, facsimiles mutually contact on color printing, paper size and a transmission in a detail mode in conformity with the Protocol CCITT - T30 by Comite consultatif international telegraphique et telephonique, and after a transmitting facsimile generally processes image data for adjusting to both of the transmitting and receiving facsimiles, transmission and reception are executed between the facsimiles. Video tape recorders read out a time signal in airwaves received by a televisior connected thereto to display an exact time to a user and utilize for reserved recording.

An appliance specifies kinds and the contents of data of other appliances whose data are necessary therefor. For example, operating conditions of air conditioners and refrigerators are generally unnecessary for video tape recorders, particularly, reserved recording. Accordingly, when the household electric appliance demands operating conditions from other household electric appliances or set information of transmitting conditions, a program such that the appliance demands necessary data

from only other necessary appliances and only the data are transmitted and received is installed in advance or can be externally set (the program is technologically installed in applications softwares and communications middlewares. Protocols and programs, therefore, have been standardized.).

Consequently, the above-mentioned functions of household electric appliances are utilized for a home network system of the present invention. In other words, household electric appliances can be incorporated into a home network system by applying the functions.

Based on the above, although the above-mentioned description is partially repeated, the execution of linked operations of household electric appliances in a home network system of Embodiment 1 and a basic decision on the processing of transmitting and receiving necessary data for the execution are described in accordance with an understandable example referring to a flow chart shown in Figure 3.

Regarding the execution of linked operations, if household electric appliances are not connected to a home network or do not have other household electric appliances to be linked thereto even in connection with a home network, linked operations are not set and household electric appliances are individually operated. Taking air conditioners for example, if an air conditioner is not connected to a home network or even in connection with a home network the other household electric appliances are appliances such as a facsimile and a video tape recorder which are not

related with the operations thereof, the air conditioner is individually operated regardless of the home network. Then, a user of the air conditioner controls switching and power level thereof, or the air conditioner is controlled under a program set by the user in its built-in timer.

That is, the steps of a1 and a2 in Figure 3 (2) are executed.

On the other hand, the steps of b1, b2 and b3 in Figure 3 (1) are executed in the presence of household electric appliances to be linked in a home network. First, a household electric appliance transmits a demand for querying to other household electric appliances in a home network whether to be linked thereto. On a response from any household electric appliances to be linked, the household electric appliance decides that the household electric appliances should be linked and executes the step of b1. That is, the household electric appliance transmits a demand for querying information of transmitting conditions of operation data of the household electric appliances to be linked, and the household electric appliance acquires the information of transmitting conditions in response thereto. Taking the above-mentioned air conditioners for example, when an illuminator is a household electric appliance to be linked in a home network, an air conditioner receives a response from the illuminator and acquires its transmittable operating conditions (lighting conditions and illuminance) and transmitting conditions (periodically or on every change in operating conditions; broadcasting, transmitting to a specific address or

transmitting in response to a query).

Next, when the information of transmitting conditions acquired from the household electric appliances to be linked does not include the transmission of necessary operation data for linked operations to the household electric appliance, or when the transmission of necessary operation data for linked operations is not set, the household electric appliance decides that the information of transmitting conditions of the household electric appliances to be linked should be set and executes the step of b2. That is, the household electric appliance transmits a demand for setting the information of transmitting conditions to the household electric appliances to be linked, and consequently the information of transmitting conditions is set so that operation data of the household electric appliances to be linked are transmitted to the household electric appliance. Subsequently, the step of b3 is executed to complete an initialization of linked operations. That is, the household electric appliance receives operation data transmitted from the household electric appliances to be linked or receives the operation data by a query, and thereafter the household electric appliance sets a storage of the operation data in a memory therefor, resulting in a completion of an initialization of linked operations. Taking illuminators for an example of household electric appliances to be linked to the above-mentioned air conditioners, when an illuminator transmits lighting conditions as operation data not on every change in operating conditions but in response to a query, the

household electric appliance transmits to the illuminator a demand for setting information of transmitting conditions such that the illuminator broadcasts or transmits thereto lighting conditions on every change in operating conditions, thereby leading to a setting of information of transmitting conditions. Subsequently, the household electric appliance receives lighting conditions transmitted from the illuminator on every change in operating conditions, and sets a storage thereof in a memory for controlling linkedly to the received lighting conditions, resulting in a completion of an initialization of linked operations.

In addition, after completing the initialization of linked operations, the steps of a3 and a4, exceptionally a5, in Figure 3 (2) are executed in the case of operating linkedly to a home network. That is, directions of linked operations in Figure 3 are provided by a user of household electric appliances in a home network, depending on a controller and household electric appliances.

The above-mentioned case is such that air conditioners are operated linkedly to illuminators and door locks; however, linked operations of more household electric appliances are actually executed in a home network. Kinds of identifier codes, therefore, are standardized in advance so that household electric appliances can be incorporated into a home network system. A program is installed in household electric appliances such that sub identifier codes are automatically provided in the presence of plural household electric appliances having the same kinds of identifier codes,

leading to a prevention of data interference by transmitting and receiving data provided with the sub identifier codes.

In condominiums, an interference of a home network system can be caused in neighboring sections (rooms). The measures, therefore, are adopted such that an electric wire is provided with a blocking filter, data are transmitted and received with the provision of different house codes in each section, or the like. Since the measures are publicly known arts, their descriptions are omitted.

Based on the above, a home network system of Embodiment 1 is described.

Figure 4 shows a principal configuration of a home network system of Embodiment 1.

In Figure 4, 100 is a controller, 101 is a means of controlling communications, 102 is a means of controlling information of transmitting conditions and 103 is a means of acquiring operation data.

300 is a household electric appliance to be linkedly operated under a controller, 301 is a means of controlling communications, 302 is a means of maintaining information of transmitting conditions, 303 is a means of controlling transmission of operation data, 304 is a means of controlling information of transmitting conditions and 305 is a means of controlling operation data.

110 is a network line utilizing an electric wire.

The means of controlling communications 101 and 301 of the

controller and the household electric appliance respectively control exchanges of necessary information with each other and, depending on the situation, other household electric appliances and sensors (both are not shown in Figure 4) by using the network line 110. Specifically, a generation of data to be transmitted, a transmission of telegraphic messages, a reception of telegraphic messages, an extraction of data to be received and the like.

Figures 5 to 7 specifically show types of configuration of the controller. In Figures 5 to 7, 101 is a network interface unit equivalent to the means of controlling communications 101 shown in Figure 4. 111 is a central process unit (CPU) configured by internal chips. 112 is an input-output (control) unit comprising a user interface (UI). 113 is a ROM programmed by a manufacturer for performing an appropriate function as the controller. 114 is a RAM in which necessary data are properly stored while performing a function as the controller. The CPU, UI, ROM and RAM serve for the means of controlling information of transmitting conditions 102 and the means of acquiring operation data 103 shown in Figure 4. Figure 6 shows a type of the controller which is not provided with the UI and Figure 7 shows a type of the controller which is provided in the CPU with the RAM.

Each household electric appliance is provided with softwares and hardwares similar to the above, which have different memory capacity and CPU performance.

Figure 8 shows a part of data stored in the ROM. Figure 8 (1) depicts

a table of information to be transmitted from each household electric appliance to a controller. The top row of Figure 8 (1) indicates that a refrigerator should transmit high, average or stop of cooling, on or off of dehumidification and a value of electric power consumption. In the top row, a single asterisk in each item indicates that the refrigerator should transmit on every change in the above-mentioned operating conditions, and double asterisks indicate that the refrigerator should transmit on every change as well as periodically. Figure 8 (2) indicates which household electric appliances are related with effective operations of each household electric appliance. For example, a refrigerator in the top row is operated regardless of other household electric appliances, while an electric power meter in the bottom row is related with household electric appliances having large electric power consumption.

Each household electric appliance has a function of meeting a demand of a controller. That is, on a demand of a controller for transmitting, the household electric appliance has a function of increasing data item to be transmitted. Another function is to transmit every other minute electric current consumption which is initially transmitted every ten minutes. For the purpose, necessary storage and adjustment can be executed in an internal memory. As a result of a demand of a controller for transmitting, a refrigerator transmits items in the top row of Figure 8 (1) to the controller. The refrigerator may offer more function such as a transmission of inside temperature to be set; however a home network

system of Embodiment 1 does not consider more function. A controller, therefore, does not demand more function and is not affected by a transmission of inside temperature to be set or the like.

Regarding a household electric appliance, the means of maintaining information of transmitting conditions 302 is a memory for maintaining the conditions of transmitting operation data, such as information and routine on when the operation data are transmitted, which operation data are transmitted and to which address the operation data are transmitted. The contents are described as the above-mentioned Figure 8 (1).

The means of controlling transmission of operation data 303 transmits operation data (controlled thereby) through the means of controlling communications 301 in accordance with the information maintained by the means of maintaining information of transmitting conditions. Specifically, switching, a load of operations, a time signal in airwaves received by a radio, and the like are transmitted periodically or on every change in operating conditions.

The means of controlling operation data 305 stores operation data of a household electric appliance constantly or periodically.

The means of controlling information of transmitting conditions 304 informs the means of maintaining information of transmitting conditions 302 of the information of transmitting conditions transmitted from a controller, and updates the information maintained by the means of maintaining information of transmitting conditions depending on the

situation. That is, the information should occasionally not be transmitted depending on kinds and the contents of household electric appliances connected to a home network.

Based on the above, a controller stores in a RAM the contents shown in Figures 8 (1) and (2) with regard to only household electric appliances currently connected to a home network system. Taking the items of an electric power meter shown in Figure 8 (2) for example, the contents shown in Figure 9 (1) are stored. This case is such that code 1 is provided for a refrigerator while codes 1 and 2 are provided for air conditioners, televisions and video tape recorders. Thus, in a home network system the electric power consumption of a household electric appliance is controlled less than a predetermined value by a program, referring to the data of an electric power meter stored in a RAM. Specifically, the refrigerator is kept switched on and one of the air conditioners or the televisions is switched off. The procedures are described in Figure 9 (2).

Alternatively, a word processor in operation is kept switched on and the refrigerator capable of pausing is switched off, then the controller, the word processor and the television are informed that the refrigerator is switched off in consideration of total electric power consumption.

The means of controlling information of transmitting conditions 102 demands from the means of controlling information of transmitting conditions 304 of a household electric appliance the transmission of information of transmitting conditions such that when and which

information is transmitted, and the information of transmitting conditions is received in response thereto. In addition, the means of controlling information of transmitting conditions demands the transmission of data such that which operating conditions can be transmitted and receives a response thereto. If the response includes the data of operating conditions, the data are transmitted to the means of acquiring operation data by the means of controlling information of transmitting conditions.

If the response of information of transmitting conditions from a household electric appliance does not include the data of operating conditions, the means of acquiring operation data demands the transmission thereof and receives.

Based on the above, the operations of household electric appliances are appropriately controlled in a home network system such that a controller is a center thereof.

Taking a user-friendly facsimile for example, a user is periodically informed by printing that facsimile number of transmitter and receiver, date and time of transmission and reception, the number of papers in transmission and reception, and how many more papers left. Also, a controller is similarly informed.

The controller, however, is informed not merely by printing but also through an electric wire. Depending on the direction of the controller, it can be informed only that date and time of transmission and reception, the number of papers in transmission and reception, and how many more

papers left.

As a specific means therefor, the controller directs that a flag be provided for only an item to be informed by a home network among transmission items maintained by the means of maintaining information of transmitting conditions 302.

In a home network system shown in Figure 1, a controller decides which operation data of a household electric appliance can be acquired, and thereafter necessary control is executed. Specifically, a controller causes a facsimile to ring a warning so as to inform a user of papers scarcely left.

When plural facsimiles are used in an office, each facsimile is provided with an identifier code (ID) by another means as described above and thereby it is decided which facsimile rings a warning.

In a home network system shown in Figure 2 (a), a control unit of a household electric appliance is properly controlled by a controller. For example, an exhaust fan informed of a lighting of a cooking stove is automatically switched on or leveled up in its power even in operation. For the purpose, a spark plug of a cooking stove detects a switch-on thereof by a user to instantaneously transmit a signal to the controller, which directs the exhaust fan to operate when out of operation or to level up its power to a maximum when in a low power or in an air-conditioned room.

(Embodiment 2)

In Embodiment 2, a household electric appliance, which utilizes

operating conditions of other household electric appliances for controlling operations thereof, acquires the operating conditions from other household electric appliances to be linked.

Kinds of other household electric appliances whose operation data are necessary for a household electric appliance are specified. For example, indoor temperature and whether an air conditioner is in operation or not are important for a ventilation fan; and particularly the operations of a cooking stove is important for an exhaust fan above the cooking stove, while whether a televisior, a washing machine and an illuminator are in operation or not is not related with the operations thereof. An exhaust fan, therefore, acquires only operation data of necessary household electric appliances such as a cooking stove so as to link the operation data to the operations thereof.

By contrast, kinds of other household electric appliances, which utilize operation data of an air conditioner, are specified. That is, the operations of an air conditioner are substantially not related with the reception of a facsimile and the operations of hot-water supplies, and additionally simultaneous operation of an air conditioner and either of a warm air circulator and an electric heater means a disorder.

The equipment of a simple appliance such as a sensor with a timer leads to a raise in costs.

Accordingly, depending on the kind of another household electric appliance to be installed in a room, the household electric appliance can

directly acquire only operation data of necessary household electric appliances not through a controller so as to link the operation data to the effective operations thereof. Embodiment 2 relates to such a case.

Figure 10 shows a constitution of Embodiment 2.

In Figure 10, 310 is a household electric appliance which outputs operation data thereof to be utilized for the operations of other household electric appliances. 301 is a means of controlling communications, 302 is a means of maintaining information of transmitting conditions, 303 is a means of controlling transmission of operation data and 311 is a means of setting information of transmitting conditions.

320 is a household electric appliance which acquires operation data of other household electric appliances so as to utilize the operation data for linked operations. 301 is a means of controlling communications, 321 is a means of transmitting demand data for setting information of transmitting conditions, 322 is a means of setting reception of operation data and 323 is a means of controlling linked operations.

The functions of the means of controlling communications 301, the means of maintaining information of transmitting conditions 302 and the means of controlling transmission of operation data in the utilized household electric appliance 310 are similar to those of Embodiment 1.

The means of setting information of transmitting conditions 311 sets in the means of maintaining information of transmitting conditions 302 the information of transmitting conditions transmitted from the utilizing

household electric appliance 320 through the network line. For example, a cooking stove informs an exhaust fan thereabove of its operations and which power level of high, medium and low when in operation on every control by a user.

The means of transmitting demand data for setting information of transmitting conditions 321 in the utilizing household electric appliance demands that the utilized household electric appliance 301 set a predetermined information of transmitting conditions. Specifically, an air conditioner demands that a thermal sensor periodically transmit temperature information; an exhaust fan above a cooking stove demands that the cooking stove transmit the information of its operations and power level in operation, and an air conditioner transmit the information of its operations.

The means of setting reception of operation data 322 functions similarly to the means of acquiring operation data of Embodiment 1 and acquires operation data transmitted from the utilized household electric appliance periodically or on every change in operating conditions.

The means of controlling linked operations 323 controls operating conditions of an appliance provided therewith in accordance with the data acquired by the means of setting reception of operation data. Specifically, if a thermal sensor transmits the information of low temperature, an air conditioner reduces its power level.

An exhaust fan above a cooking stove is not merely automatically

switched on when the cooking stove is lit, but also is leveled up in its power to a maximum so that the air heated by the cooking stove is prevented from diffusing into a room when an air conditioner is in operation, and additionally depending on the situation the exhaust fan considers indoor temperature and raises a volume of a television in operation.

Figure 11 shows procedures for performing the functions of an exhaust fan.

In Figure 11, (1) shows procedures for linked operations to a cooking stove and an air conditioner on an introduction of an exhaust fan to a home network system. (2) shows procedures for linked operations particularly to a cooking stove as a part of a home network system. In Embodiment 2, it is detected by the presence of an air conditioner within a direct reach of ultrasonic signals from an exhaust fan (the presence of its response thereto) whether the air conditioner exists near the exhaust fan.

In addition, similar functions are performed in linked operations of an audio appliance and an illuminator to a curtain and a window blind. That is, when an audio appliance is switched on at a higher volume than a predetermined volume or an illuminator is switched on, a curtain and a window blind are automatically shut unless a user transmits a direction. Moreover, when an air conditioner is in operation with a great difference between a temperature to be set and indoor temperature, a curtain and a window blind are automatically shut.

A storage heater for water by utilizing electric power at nighttime can be operated in a full power level after confirming that another appliance consuming great electric power such as a warm air circulator is out of operation at nighttime.

In Embodiment 2, whether a controller exists or not, a household electric appliance has the means of controlling linked operations, which is an added software, for controlling in accordance with the directions from a network, resulting in appropriate linked operations to another related household electric appliance without causing a raise in costs.

(Embodiment 3)

Embodiment 3 employs a device for setting linked operations.

Figure 12 shows a constitution of Embodiment 3.

In Figure 12, 40 is a device for setting linked operations, which is connected to a home network system on an introduction of a household electric appliance thereto.

402 is a means of transmitting demand data for setting information of transmitting conditions, which transmits data for setting information of transmitting conditions to the means of setting information of transmitting conditions 311 of a predetermined household electric appliance through the network line 110.

403 is a means of transmitting demand data for setting reception of operation data, which sets a predetermined reception in the means of setting reception of operation data of a household electric appliance.

330 is a household electric appliance in which necessary conditions for linked operations are set by the device for setting linked operations. Except that the data to be maintained are set by the device for setting linked operations, the functions of the means of maintaining information of transmitting conditions 302, the means of controlling transmission of operation data 303, the means of setting information of transmitting conditions 311, the means of setting reception of operation data 322 and the means of controlling linked operations 323 are similar to those of Embodiments 1 and 2.

In Embodiment 3, a device comprising an integrated circuit into which a means of communicating, a means of displaying, a means of inputting and various commands are incorporated is necessary in setting initial linked operations and introducing a household electric appliance to a home network system, while the device is unnecessary thereafter and predetermined household electric appliances are linkedly operated without a controller.

Specifically, a personal computer reads in a program in setting a home network; a necessary circuit for a home network is incorporated in advance into household electric appliances connected thereto; the program accesses all of the household electric appliances by a signal of a wireless or an electric wire for every setting object in the home network such as air conditioning and energy saving; and the program displays the household electric appliances and the items of linked operations depending on the

situation, leading to proper setting of linked operations and necessary displays. Furthermore, predetermined household electric appliances are linkedly operated without a controller, resulting in less electric power consumption. (A software and a hardware in consideration of a home network system are incorporated into household electric appliances in the stage of manufacturing.)

(Embodiment 4)

Embodiment 4 applies Embodiments 2 and 3 to an air conditioner to be linkedly operated after receiving the data from a sensor for the presence of persons. Figure 13 shows an application of Embodiment 2 and Figure 14 shows an application of Embodiment 3.

In Embodiment 4, a sensor for the presence of persons is installed in a room provided with an air conditioner so as to detect the presence of persons by infrared ray from the persons and a movement of the source of infrared ray.

A sensor for the presence of persons detects the absence of persons to inform an air conditioner of the absence. Thereafter, the air conditioner informed thereof is leveled down in its power, and is switched off and on standby after the absence for a predetermined time such as an hour. In the case of few persons in offices, the air conditioner may be leveled down in its power or an angle of a damper thereof may be decreased.

Alternatively, an electric current meter is applied in substitution for a sensor for the presence of persons so that the electric power consumption

of an air conditioner is maintained at a predetermined value or less and the electric power consumption in the whole house or office is maintained at a predetermined value or less. Thus, the electric power consumption of another appliance such as a personal computer can be increased in a house or a building. A fan around an air conditioner can start to be operated in accordance with a decrease in the power level of the air conditioner. In an office, an air conditioner can be leveled up in its power so as to cool the office during nonuse of a word processor, a personal computer and the like at lunchtime and before work in the morning as well as when indoor temperature is preferably lowered due to the walking of an office worker. After starting work the air conditioner can be leveled down in its power so that the indoor temperature gradually changes to a temperature appropriate for desk work and thereafter somewhat high temperature with a decrease in electric power consumption, and consequently the office worker can maintain motivations (the office worker loses motivations and becomes sleepy due to the maintenance of a certain temperature, resulting in a decrease in the efficiency of working for the whole office).

(Embodiment 5)

Embodiment 5 incorporates an integrated control device for a home network system into a remote controller (a remote control device for a user) common to an air conditioner, a televisior, a video tape recorder and the like. Figure 15 shows a constitution of Embodiment 5.

A remote controller common to an air conditioner, a televisior, a video

tape recorder and an audio appliance has been usable or frequently considered to be usable in recent years.

In this case, the remote controller not merely comprises a transmitter of infrared ray or electromagnetic wave for controlling the operations of various appliances but also instantaneously causes the control of a user to be reflected in a transmission of a direction to an appliance to be controlled. Accordingly, in the case of an air conditioner, a televisior and a video tape recorder, it is particularly made more effective that various appliances in a home network system are operated with the reflection of the control of the user, for example, an adjustment of electric power consumption, an open and shut of a curtain and a window blind, and a switch-on of an illuminator linked with a clock.

In addition, when total electric power consumption of household electric appliances surpasses a limited value due to a switch-on and a power level-up of a household electric appliance by the user, the remote controller displays thereabout so as to cause the user to choose which another household electric appliance is switched off. Thus, an inconvenience due to a sudden blowout of a fuse and a switch-off of NFB can be prevented such that not merely all appliances including an illuminator are suddenly switched off at nighttime but also all data being currently stored in a word processor are deleted.

The remote controller can easily warn the user of an unnatural direction such that an air conditioner is switched on during the operation

of a warm air circulator.

The present invention was described above based on the embodiments and is not limited thereto. That is, the following changes and modifications may be made thereto.

1) An appliance connected to a home network system does not have elements (constitutions, requirements and specified matters) of the present invention.

2) The manners of claims are concurrently employed. That is, an appliance is controlled by a controller, while another appliance is not controlled.

3) In Embodiment 3, an initial setting is executed also using an exclusive connection line.

4) A utilized appliance is not a household electric appliance but a sensor for the presence of persons, electric power consumption and illuminance. Thus, a utilizing appliance such as an air conditioner and an illuminator is leveled down in its power or switched off in the absence of persons. Alternatively, a utilized appliance is a switch. Thus, a heater using kerosene for fuel is switched on so that indoor temperature rises and the density of carbon dioxide increases, and thereafter a ventilation fan is switched on.

5) In Embodiment 3, the functions of a personal computer can be used for a means of communicating, a means of displaying and a means of inputting. Consequently, linked operations are

substantially set in a disk storing a necessary program. The setting can be executed not merely by plugging in an electric source input unit besides a transmission unit of a wearable device for setting linked operations but also by employing various means such as an input device by a user.

6) Regarding a decrease in total electric power consumption, when a user directs another appliance to be switched on, a remote controller has a function of displaying that the user should choose which appliance is switched off due to the excess in total electric power consumption. The procedures are as follows: an allowance for electric power supply is calculated in advance by total electric power consumption of appliances in operation and a capacity for electric power supply (referring to Figure 9 (2)), and a warning is displayed if electric power consumption of another appliance which is switched on by the user is not within the allowance (similar to the steps of a1, a3 and a5 in Figure 3 (2)).

7) An appliance is not limited to a household electric appliance and a home network system is intended not merely for a house but also for a section of an office.

8) When an installation of another appliance in a home network system leads to the presence of plural controllers and means of controlling linked operations therein, a program is incorporated therein such that second controller or second means of controlling

linked operations is not operated.

INDUSTRIAL APPLICABILITY

It is to be understood from the above description that linked operations of appliances are easily and flexibly set according to the present invention.

An embodiment offers less electric power consumption.

An inconvenience due to a user's careless control can be prevented.

What is claimed is :

1. A control network system of an appliance comprising a controller and a plurality of appliances connected through a network;

wherein the appliances acquire necessary operation data of another appliance from the controller and utilize the operation data for controlling an efficient operation thereof;

each of said appliances comprising:

a means of maintaining an information of a transmitting condition of operation data thereof;

a means of controlling the operation data thereof by a predetermined program;

a means of controlling the information of the transmitting condition for receiving a demand for transmitting the information of the transmitting condition by said controller, and transmitting and setting the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition in response thereto; and

a means of controlling a transmission of the operation data for transmitting the operation data thereof controlled by said means of controlling the operation data in accordance with the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition;

said controller comprising:

a means of controlling the information of the transmitting condition for demanding a transmission of the data maintained by said means of maintaining the information of the transmitting condition from said means of controlling the information of the transmitting condition of each of said appliances, receiving the information of the transmitting condition transmitted from each of the appliances in response thereto, setting a control item in the information of the transmitting condition, and demanding a setting of the information of the transmitting condition of a control item when the information of the transmitting condition does not include the necessary control item; and

a means of acquiring the operation data for acquiring the operation data when the information of the transmitting condition of each of said appliances received by said means of controlling the information of the transmitting condition includes a transmission of the operation data of the appliance to said controller, and demanding a transmission of the operation data from an appliance to acquire the operation data when the information of the transmitting condition of each of said appliances received by said means of controlling the information of the transmitting condition does not include the transmission of the operation data of the appliance to said controller.

2. A control network system of an appliance comprising a plurality of appliances connected through a network;

wherein each of the appliances receives necessary operation data of another appliance through the network and controls an efficient operation thereof to be linked to the received operation data;

each of the appliances whose operation data are utilized comprising:

a means of maintaining an information of a transmitting condition of operation data thereof;

a means of controlling a transmission of the operation data for controlling the operation data thereof by a predetermined program, and transmitting the operation data thereof in accordance with the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition; and

a means of setting the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition in accordance with predetermined demand data for setting the information of the transmitting condition received through the network;

each of the appliances utilizing operation data of another appliance comprising:

a means of transmitting predetermined data for setting the information of the transmitting condition to the means of setting

the information of the transmitting condition of another related appliance;

a means of setting a reception of the operation data for receiving the operation data transmitted from another appliance in accordance with the demand data for setting the information of the transmitting condition, and setting a necessary storage of the operation data in a corresponding memory thereto; and

a means of controlling a linked operation for controlling an efficient operation thereof in accordance with the operation data of another appliance received and set by the means of setting the reception of the operation data.

3. A control network system of an appliance comprising a plurality of appliances which are connected through a network and are set so as to be linkedly operated by a wearable device for setting a linked operation;

wherein each of the appliances receives operation data of another appliance through the network and controls an efficient operation thereof to be linked to the received operation data;

each of said appliances comprising:

a means of maintaining an information of a transmitting condition of operation data thereof;

a means of controlling a transmission of the operation data for controlling the operation data thereof by a predetermined program, and transmitting the operation data thereof in

accordance with the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition;

a means of setting the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition in accordance with predetermined demand data for setting the information of the transmitting condition received through the network;

a means of setting a reception of the operation data for receiving the operation data transmitted from another appliance in accordance with the demand data for setting the information of the receiving condition received through the network, and setting a necessary storage of the operation data in a corresponding memory thereto; and

a means of controlling a linked operation for controlling an efficient operation thereof in accordance with the operation data of another appliance received and set by the means of setting the reception of the operation data;

said wearable device for setting a linked operation comprising:

a means of transmitting demand data for setting the information of the transmitting condition for transmitting predetermined demand data for setting the information of the transmitting condition to each of the appliances, and setting the information of

the transmitting condition in setting the network and introducing another appliance thereto; and

a means of transmitting demand data for setting the information of the receiving condition of the operation data for transmitting the demand data for setting the reception of the operation data to each of the appliances, and receiving and setting the operation data in setting the network and introducing another appliance thereto.

4. A control network system of an appliance comprising a plurality of appliances including an air conditioner and a sensor for a presence of a person, which are connected through a network;

wherein each of the appliances receives necessary operation data of another appliance through the network and controls an efficient operation thereof to be linked to the received operation data;

said sensor for a presence of a person comprising:

a means of maintaining an information of a transmitting condition of detection data for a presence of a person which are operation data thereof;

a means of controlling a transmission of the operation for controlling the detection data for the presence of the person by a predetermined program, and transmitting the controlled detection data for the presence of the person in accordance with the information of the transmitting condition maintained by said

means of maintaining the information of the transmitting condition; and

a means of setting the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition in accordance with predetermined demand data for setting the information of the transmitting condition received through the network;

said air conditioner comprising:

a means of transmitting predetermined demand data for setting the information of the transmitting condition to the means of setting the information of the transmitting condition of said sensor for the presence of the person;

a means of setting the reception of the operation data for receiving the detection data for the presence of the person transmitted from the sensor for the presence of the person in accordance with the demand data for setting the information of the transmitting condition, and setting a necessary storage of the detection data for the presence of the person in a corresponding memory thereto; and

a means of controlling a linked operation for controlling an operation of the air conditioner in accordance with the detection data for the presence of the person received and set by the means of setting the reception of the operation data.

5. A control network system of an appliance comprising a plurality of appliances including an air conditioner and an electric power sensor, which are connected through a network;

wherein each of the appliances receives necessary operation data of another appliance through the network and controls an efficient operation thereof to be linked to the received operation data;

said electric power sensor comprising:

a means of maintaining an information of a transmitting condition of detection data for an electric power which are operation data thereof;

a means of controlling a transmission of the operation for controlling the detection data for the electric power by a predetermined program, and transmitting the controlled detection data for the electric power in accordance with the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition; and

a means of setting the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition in accordance with predetermined demand data for setting the information of the transmitting condition received through the network;

said air conditioner comprising:

a means of transmitting predetermined demand data for setting the

information of the transmitting condition to the means of setting the information of the transmitting condition of said electric power sensor;

a means of setting a reception of the operation data for receiving the detection data for the electric power transmitted from the electric power sensor in accordance with the demand data for setting the information of the transmitting condition, and setting a necessary storage of the detection data for the electric power in a corresponding memory thereto; and

a means of controlling a linked operation for controlling an operation of the air conditioner in accordance with the detection data for the electric power of the electric power sensor received and set by the means of setting the reception of the operation data.

6. A control network system of an appliance comprising a plurality of household electric appliances including an air conditioner and a sensor for a presence of a person, which are connected through a network and are set so as to be linkedly operated by a wearable device for setting a linked operation;

wherein each of the appliances receives necessary operation data of another appliance through the network and controls an efficient operation thereof to be linked to the received operation data; said sensor for a presence of a person comprising:

a means of maintaining an information of a transmitting condition of

detection data for a presence of a person which are operation data thereof;

a means of controlling a transmission of the operation for controlling the detection data for the presence of the person by a predetermined program, and transmitting the controlled operation data thereof in accordance with the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition; and

a means of setting the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition in accordance with predetermined demand data for setting the information of the transmitting condition received through the network;

said air conditioner comprising:

a means of setting a reception of the operation data for receiving the detection data for the presence of the person transmitted from the sensor for the presence of the person in accordance with the demand data for setting a method of the receiving condition received through the network, and setting a necessary storage of the detection data for the presence of the person in a corresponding memory thereto; and

a means of controlling a linked operation for controlling an operation of the air conditioner in accordance with the detection data for

the presence of the person received and set by the means of setting the reception of the operation data;

said wearable device for setting a linked operation comprising:

a means of transmitting demand data for setting the information of the transmitting condition for transmitting demand data for setting the information of the transmitting condition to the appliances including said sensor for the presence of the person, and setting the information of the transmitting condition in setting the network and introducing another appliance thereto; and

a means of transmitting demand data for setting the reception of the operation data for transmitting the information of the receiving condition of the operation data to the appliances including said air conditioner, and receiving and setting the operation data in setting the network and introducing another appliance thereto.

7. A control network system of an appliance comprising a plurality of household electric appliances including an air conditioner and an electric power sensor, which are connected through a network and are set so as to be linkedly operated by a wearable device for setting a linked operation;

wherein each of the appliances receives necessary operation data of another appliance through the network and controls an efficient operation thereof to be linked to the received operation data;

said electric power sensor comprising:

a means of maintaining an information of a transmitting condition of detection data for an electric power which are operation data thereof;

a means of controlling a transmission of the operation for controlling the detection data for the electric power by a predetermined program, and transmitting the controlled operation data thereof in accordance with the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition; and

a means of setting the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition in accordance with predetermined demand data for setting the information of the transmitting condition received through the network;

said air conditioner comprising:

a means of setting a reception of the operation data for receiving the detection data for the electric power transmitted from the electric power sensor in accordance with the demand data for setting a method of the receiving condition received through the network, and setting a necessary storage of the detection data for the electric power in a corresponding memory thereto; and

a means of controlling a linked operation for controlling an operation

of the air conditioner in accordance with the detection data for the electric power received and set by the means of setting the reception of the operation data;

said wearable device for setting a linked operation comprising:

a means of transmitting demand data for setting the information of the transmitting condition for transmitting demand data for setting the information of the transmitting condition to the appliances including said electric power sensor, and setting the information of the transmitting condition in setting the network and introducing another appliance thereto; and

a means of transmitting demand data for setting the reception of the operation data for transmitting the information of the receiving condition of the operation data to the appliances including said air conditioner, and receiving and setting the operation data in setting the network and introducing another appliance thereto.

8. A control network system of an appliance comprising a controller and a plurality of appliances connected through a network;

wherein the appliances acquire necessary operation data of another appliance from the controller and utilize the operation data for controlling an efficient operation thereof;

each of said appliances comprising:

a means of maintaining an information of a transmitting condition of operation data including at least one of an electric power

consumption and an electric current consumption thereof;

a means of controlling the operation data including at least one of the electric power consumption and the electric current consumption thereof by a predetermined program;

a means of controlling the information of the transmitting condition for receiving a demand for transmitting the information of the transmitting condition including at least one of the electric power consumption and the electric current consumption by said controller, and transmitting and setting the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition in response thereto;

a means of controlling a transmission of the operation data for transmitting the operation data including at least one of the electric power consumption and the electric current consumption thereof controlled by said means of controlling the operation data in accordance with the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition; and

a means of controlling the electric power consumption for controlling at least one of the electric power consumption and the electric current consumption in accordance with a control by said controller;

said controller comprising:

a means of controlling the information of the transmitting condition for demanding a transmission of the data maintained by said means of maintaining the information of the transmitting condition from said means of controlling the information of the transmitting condition of each of said appliances, receiving the information of the transmitting condition transmitted from each of the appliances in response thereto, setting a control item in the information of the transmitting condition, and demanding a setting of the information of the transmitting condition of a control item when the information of the transmitting condition does not include the necessary control item including at least one of the electric power consumption and the electric current consumption;

a means of acquiring the operation data for acquiring the operation data when the information of the transmitting condition of each of said appliances received by said means of controlling the information of the transmitting condition includes the operation data including at least one of the electric power consumption and the electric current consumption of the appliance, and demanding a transmission of the operation data from an appliance to acquire the operation data when the information of the transmitting condition of each of said appliances received by said means of controlling the information of the transmitting condition does not

include the operation data including at least one of the electric power consumption and the electric current consumption of the appliance; and

a means of controlling a total electric power consumption for controlling so that at least one of a total electric power consumption and a total electric current consumption of the plurality of appliances connected through the network does not surpass a predetermined value in accordance with the operation data acquired by said means of acquiring the operation data.

9. A control network system of an appliance comprising a plurality of appliances which are connected through a network and are set so as to be linkedly operated by a wearable device for setting a linked operation;

wherein each of the appliances receives operation data of another appliance through the network and controls an efficient operation thereof to be linked to the received operation data;

each of said appliances comprising:

a means of maintaining an information of a transmitting condition of operation data including at least one of an electric power consumption and an electric current consumption thereof;

a means of controlling a transmission of the operation data for controlling the operation data including at least one of the electric power consumption and the electric current consumption thereof by a predetermined program, and transmitting the

operation data thereof in accordance with the information of the transmitting condition maintained by said means of maintaining the information of the transmitting condition;

a means of setting the information of the transmitting condition including at least one of the electric power consumption and the electric current consumption maintained by said means of maintaining the information of the transmitting condition in accordance with predetermined demand data for setting the information of the transmitting condition received through the network;

a means of setting a reception of the operation data for receiving the operation data including at least one of the electric power consumption and the electric current consumption transmitted from another appliance in accordance with the demand data for setting the information of the receiving condition received through the network, and setting a necessary storage of the operation data in a corresponding memory thereto; and

a means of controlling a linked operation for controlling an efficient operation thereof in accordance with the operation data of another appliance received and set by the means of setting the reception of the operation data;

said wearable device for setting a linked operation comprising:

a means of transmitting demand data for setting the information of

the transmitting condition for transmitting predetermined demand data for setting the information of the transmitting condition including at least one of the electric power consumption and the electric current consumption to each of the appliances, and setting the information of the transmitting condition in setting the network and introducing another appliance thereto; and

a means of transmitting demand data for setting the information of the receiving condition of the operation data for transmitting demand data for setting the reception of the operation data including at least one of the electric power consumption and the electric current consumption to each of the appliances, and receiving and setting the operation data in setting the network and introducing another appliance thereto.

10. A control network system of an appliance according to any one of Claims 1 to 9,

wherein an operation of at least one of said plurality of appliances connected through the network can be directly controlled by a user with a common remote controller; and
said controller or said means of controlling a linked operation is provided for said remote controller.

11. A control network system of an appliance according to Claim 10, wherein said remote controller comprises a means of displaying a warning

of a disorder when the disorder is caused such that at least one of a total electric power consumption and a total electric current of the plurality of appliances surpasses a limited value due to an operation of another appliance by the user.

12. A control network system of an appliance according to any one of Claims 1 to 9, wherein a remote controller of at least one of said plurality of appliances connected through the network comprises a means of displaying a warning of a disorder when the disorder is caused such that at least one of a total electric power consumption and a electric current of the plurality of appliances surpasses a limited value due to an operation of another appliance by a user.

ABSTRACT

In a control network system of household electric appliances, particularly, an each introduction of a household electric appliance thereto does not cause a change in the means of acquiring operation data by a controller, and the electric power consumption of a controller is made less.

A home network system is simplified and made efficient.

As a means for the above, an accessible device in a common manner to household electric appliances is incorporated into a controller by object processing using communications middlewares, and a device for linked operations is incorporated into household electric appliances. Then, it is noted that each household electric appliance needs a specific kind of another appliance and operation data thereof.

Fig. 1

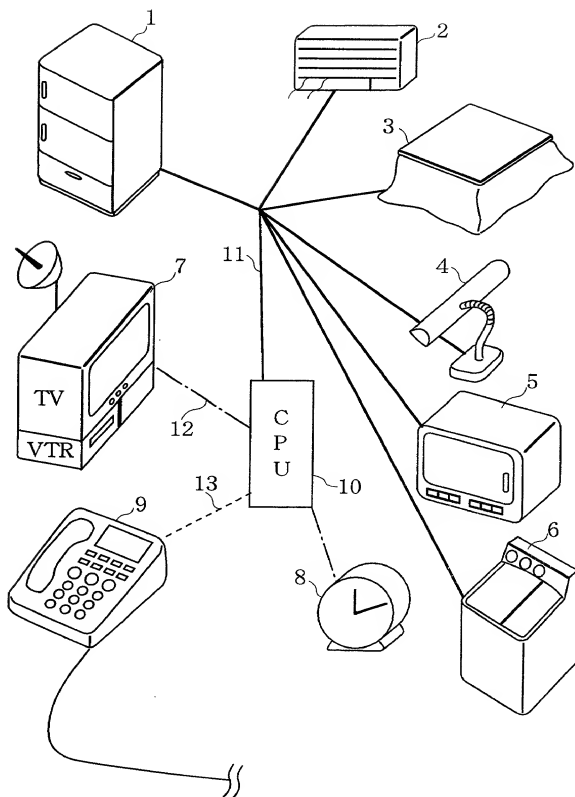


Fig. 2

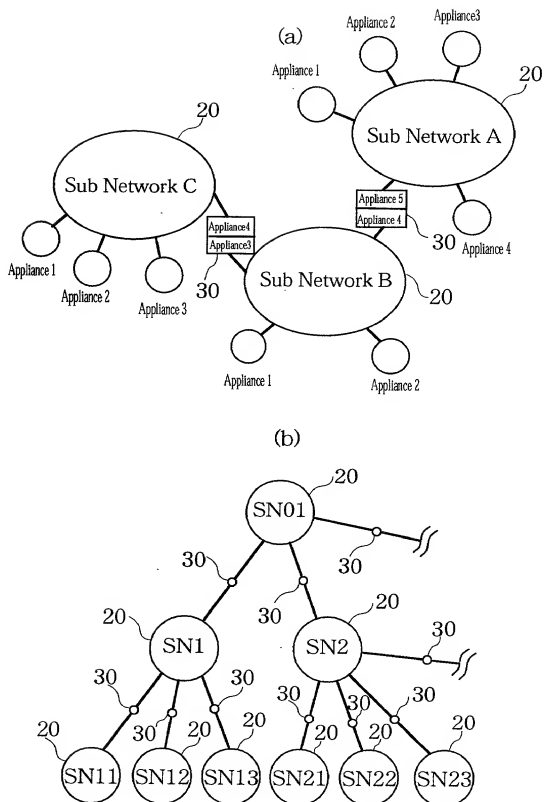


Fig. 3

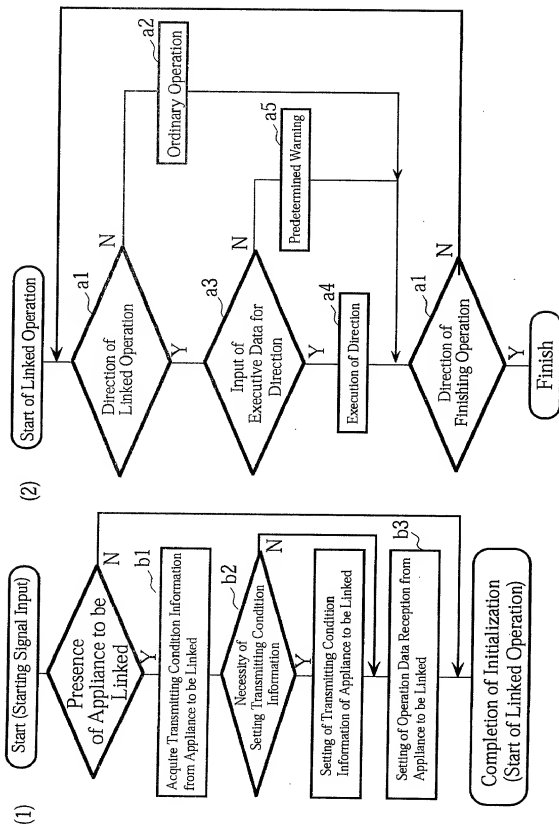


Fig. 4

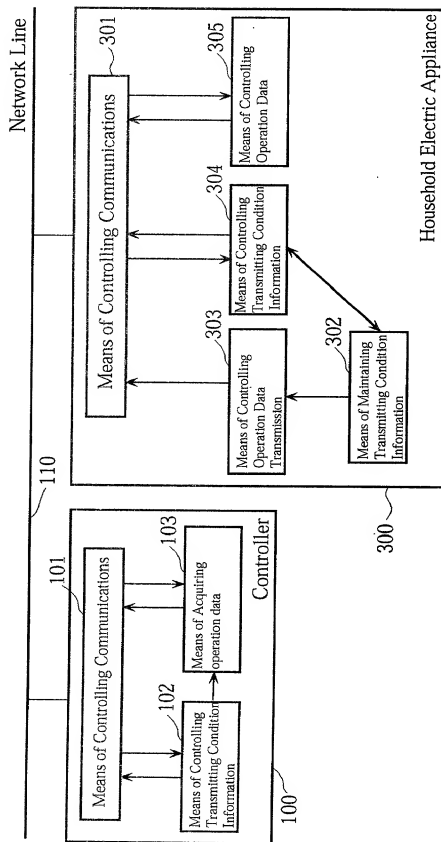


Fig. 5

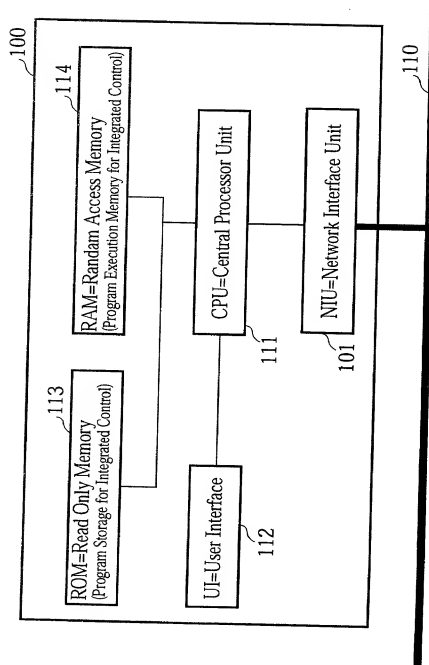


Fig. 6

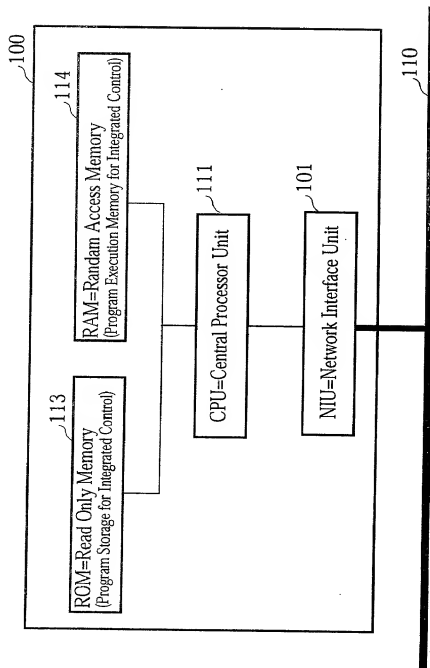


Fig. 7

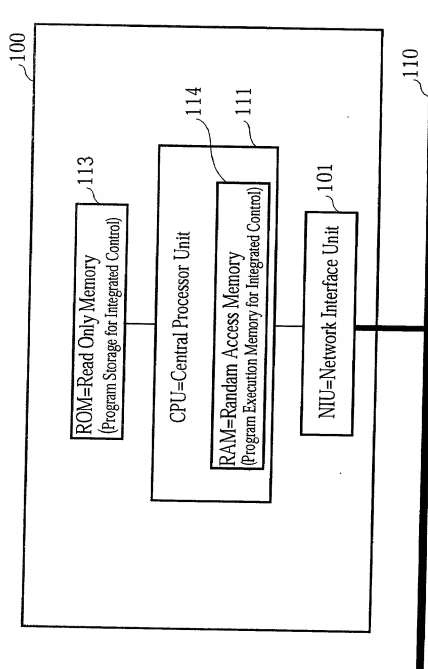


Fig. 8

(1)

Refrigerator	※Cooling	※Dehumidification	※ Electric Power ※ Consumption	Transmission Address
	High,Average or Stop	On or Off	KW	---
Air Conditioner	※ Cooling	※Dehumidification	※ Heating	Transmission Address
	High,Average or Stop	On or Off	High,Average or Stop	---
⋮	⋮			
Ventilation Fan	※Operation	※ Electric Power Consumption	---	
	High,Average,low or Stop	KW	---	

(2)

Refrigerator	
Air Conditioner	Thermal sensor,Illuminator, Lock of Door ---
Ventilation Fan	Cooking Stove,Microwave Oven,Thermal sensor,Gas Sensor ---
⋮	⋮
Electric Power Meter	Refrigerator,Air Conditioner,Electric Kotatsu,Televisor ---

Fig. 9

(1)

Electric Power Meter	Refrigerator	Air Conditioner	Televisor	Video Tape Recorder	---
	REF1	AC1	TV1	VTR1	---
		AC2	TV2	VTR2	---

(2)

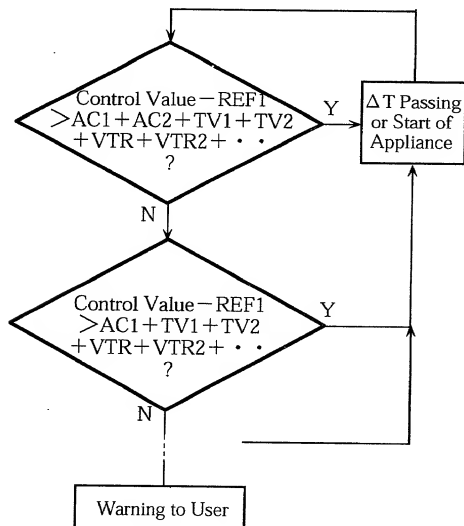


Fig.10

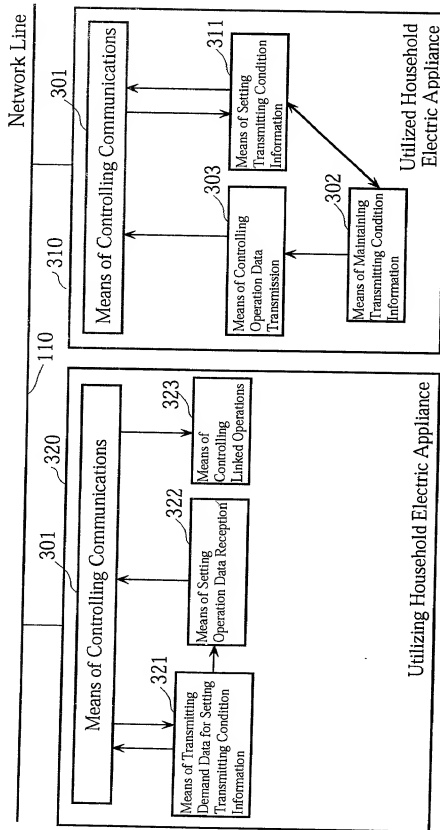


Fig. 11


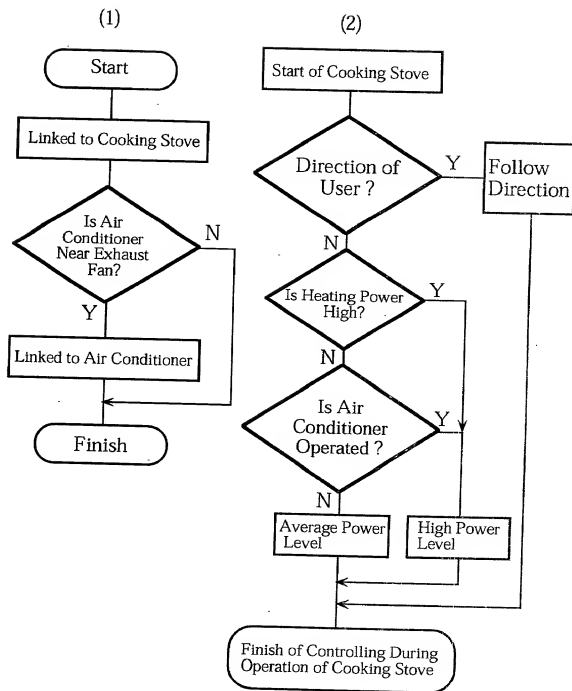


Fig. 12

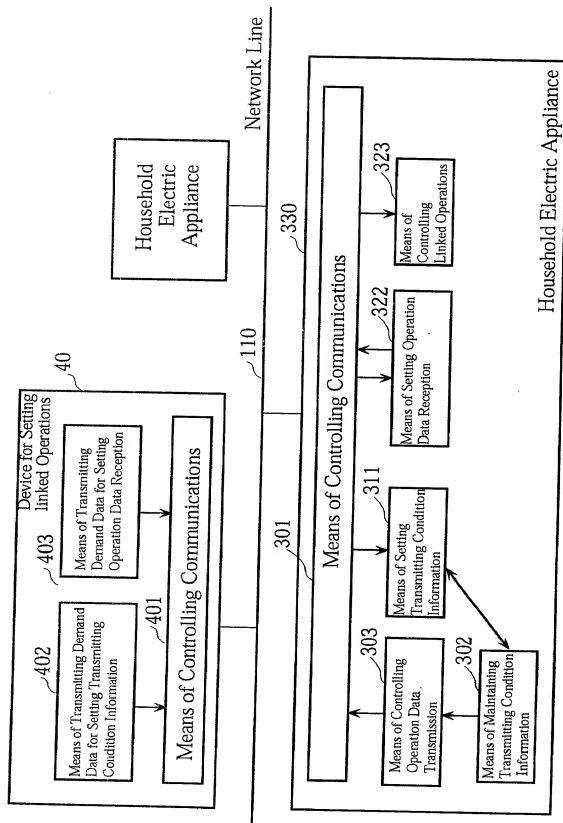

Network Line



Fig. 14


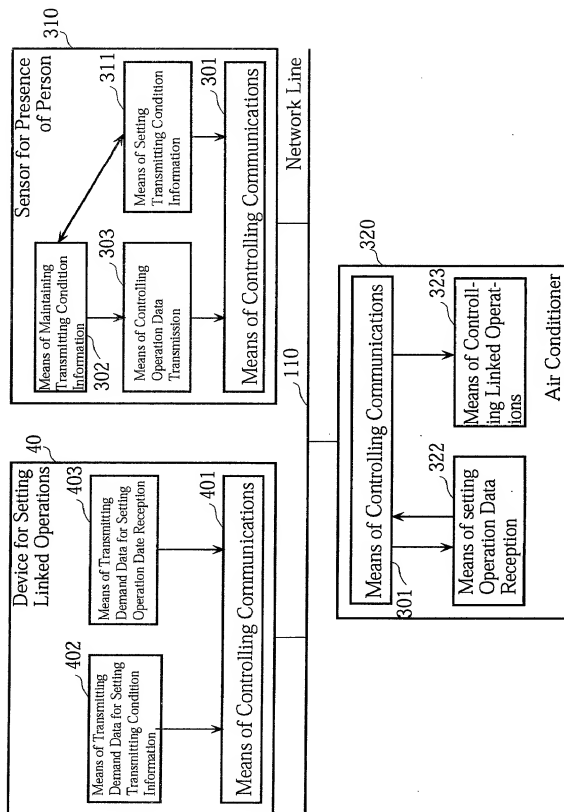


Fig. 15

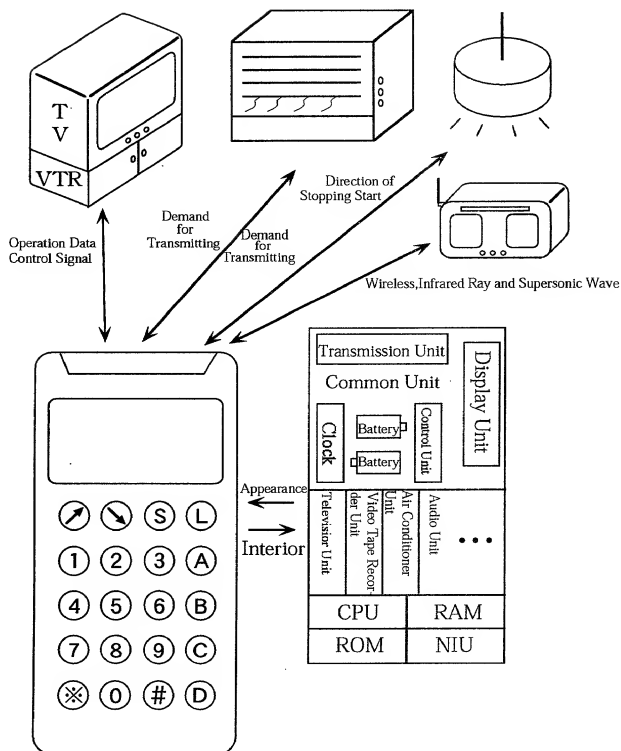

**Declaration and Power of Attorney
Under Patent Cooperation Treaty
35 USC §371(c)(4)**

As a below named inventor, I hereby declare that:

my residence, post office address and citizenship are as stated below next to my name; that

I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural names are named below) of the invention entitled: CONTROL NETWORK SYSTEM OF

HOUSEHOLD ELECTRIC APPLIANCE
described and claimed in the international application number PCT/JP00/04718 filed July 13, 2000
and as amended on _____ (if any), the specification and claims of which I have reviewed and understand
and for which I solicit a patent.

I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a), and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to my international application by me or my legal representatives or assigns, except as follows:

Japanese Patent Application No. H11-199145 filed on July 13, 1999

The priority of the above applications (if any), filed within a year prior to my international application is hereby claimed under 35 USC 119. I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the patent office:

Roger W. Parkhurst, Reg. No. 25,177; Charles A. Wendel, Reg. No. 24,453; Lawrence D. Eisen, Reg. No. 41,009.

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO:
PARKHURST & WENDEL, L.L.P., 1421 PRINCE STREET, SUITE 210, ALEXANDRIA, VIRGINIA 22314-2805, TELEPHONE (703) 739-0220.**

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

3. Full Name of Sole or First Inventor Yasuyuki SHINTANI
Given Name Middle Initial Family Name
- *4. Inventor's Signature Yasuyuki Shintani
- Date of Signature Feb. 7th 2001
Month Day Year
6. Residence Nishinomiya-shi Hyogo JAPAN
City State or Province Country
7. Citizenship Japanese
8. Post Office address 1-5-8-301, Kamikoshien, Nishinomiya-shi, Hyogo 663-8114 JAPAN
(Insert complete mailing address, including country)

*IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE ☒.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

PAGE 2 OF U.S.A. DECLARATION FORM
(Discard this page in a sole inventor application)

1	Typewritten Full Name of Second Joint Inventor (if any)	Reiko		UENO
		Given Name	Middle Initial	Family Name
*4	Inventor's Signature	Reiko		Ueno
5	Date of Signature	Feb. 7th		2001
		Month	Day	Year
6	Residence	Takarazuka-shi	Hyogo	JAPAN
		City	State or Province	Country
7	Citizenship	Japanese		
8	Post Office Address (Insert complete mailing address, including country)	1-11-1-404, Asahicho, Takarazuka-shi, Hyogo 665-0835 JAPAN		
3	Typewritten Full Name of Third Joint Inventor (if any)			
		Given Name	Middle Initial	Family Name
*4	Inventor's Signature			
5	Date of Signature			
		Month	Day	Year
6	Residence			
		City	State or Province	Country
7	Citizenship			
8	Post Office Address (Insert complete mailing address, including country)			
3	Typewritten Full Name of Fourth Joint Inventor (if any)			
		Given Name	Middle Initial	Family Name
*4	Inventor's Signature			
5	Date of Signature			
		Month	Day	Year
6	Residence			
		City	State or Province	Country
7	Citizenship			
8	Post Office Address (Insert complete mailing address, including country)			
3	Typewritten Full Name of Fifth Joint Inventor (if any)			
		Given Name	Middle Initial	Family Name
*4	Inventor's Signature			
5	Date of Signature			
		Month	Day	Year
6	Residence			
		City	State or Province	Country
7	Citizenship			
8	Post Office Address (Insert complete mailing address, including country)			

*Note to Inventors: Please sign name on line 4 exactly as it appears in line 3 and insert the actual date of signing on line 5.

**This form may be executed only when attached to the first page of the Declaration and Power of Attorney form and the specification (including claims) of the application to which it pertains.